

Technical instruction Chinese pole – Compagnie Les Mât Dam's

Playing area	width	minimal 6m, ideal 8m
	depth	minimal 6m, ideal 8m
	height	minimal 5m, ideal over 7,50 m
	ground	as planar as possible


Sound electrical outlet for an amplifier of 220V nearby.

Light according to agreement

For the Chinese pole we will need three or four anchor points. They should be approximately six meters away from the pole and in equal distance to each other. Each anchor point has to stand a gross load hauled of 400kg! minimum at least. Here some examples: set in concrete fastenings in a wall tightened benches, trees, street lamps, nail pegs, weights or other equipment.


profile view

The anchor points can be arranged in the height of maximal 1,80m.
Each of the 3 (or 4) anchor points on the ground has to stand 400 kg! of gross load hauled at least.
(anchor points set in concrete, on the ground fixed weight or concrete blocks).

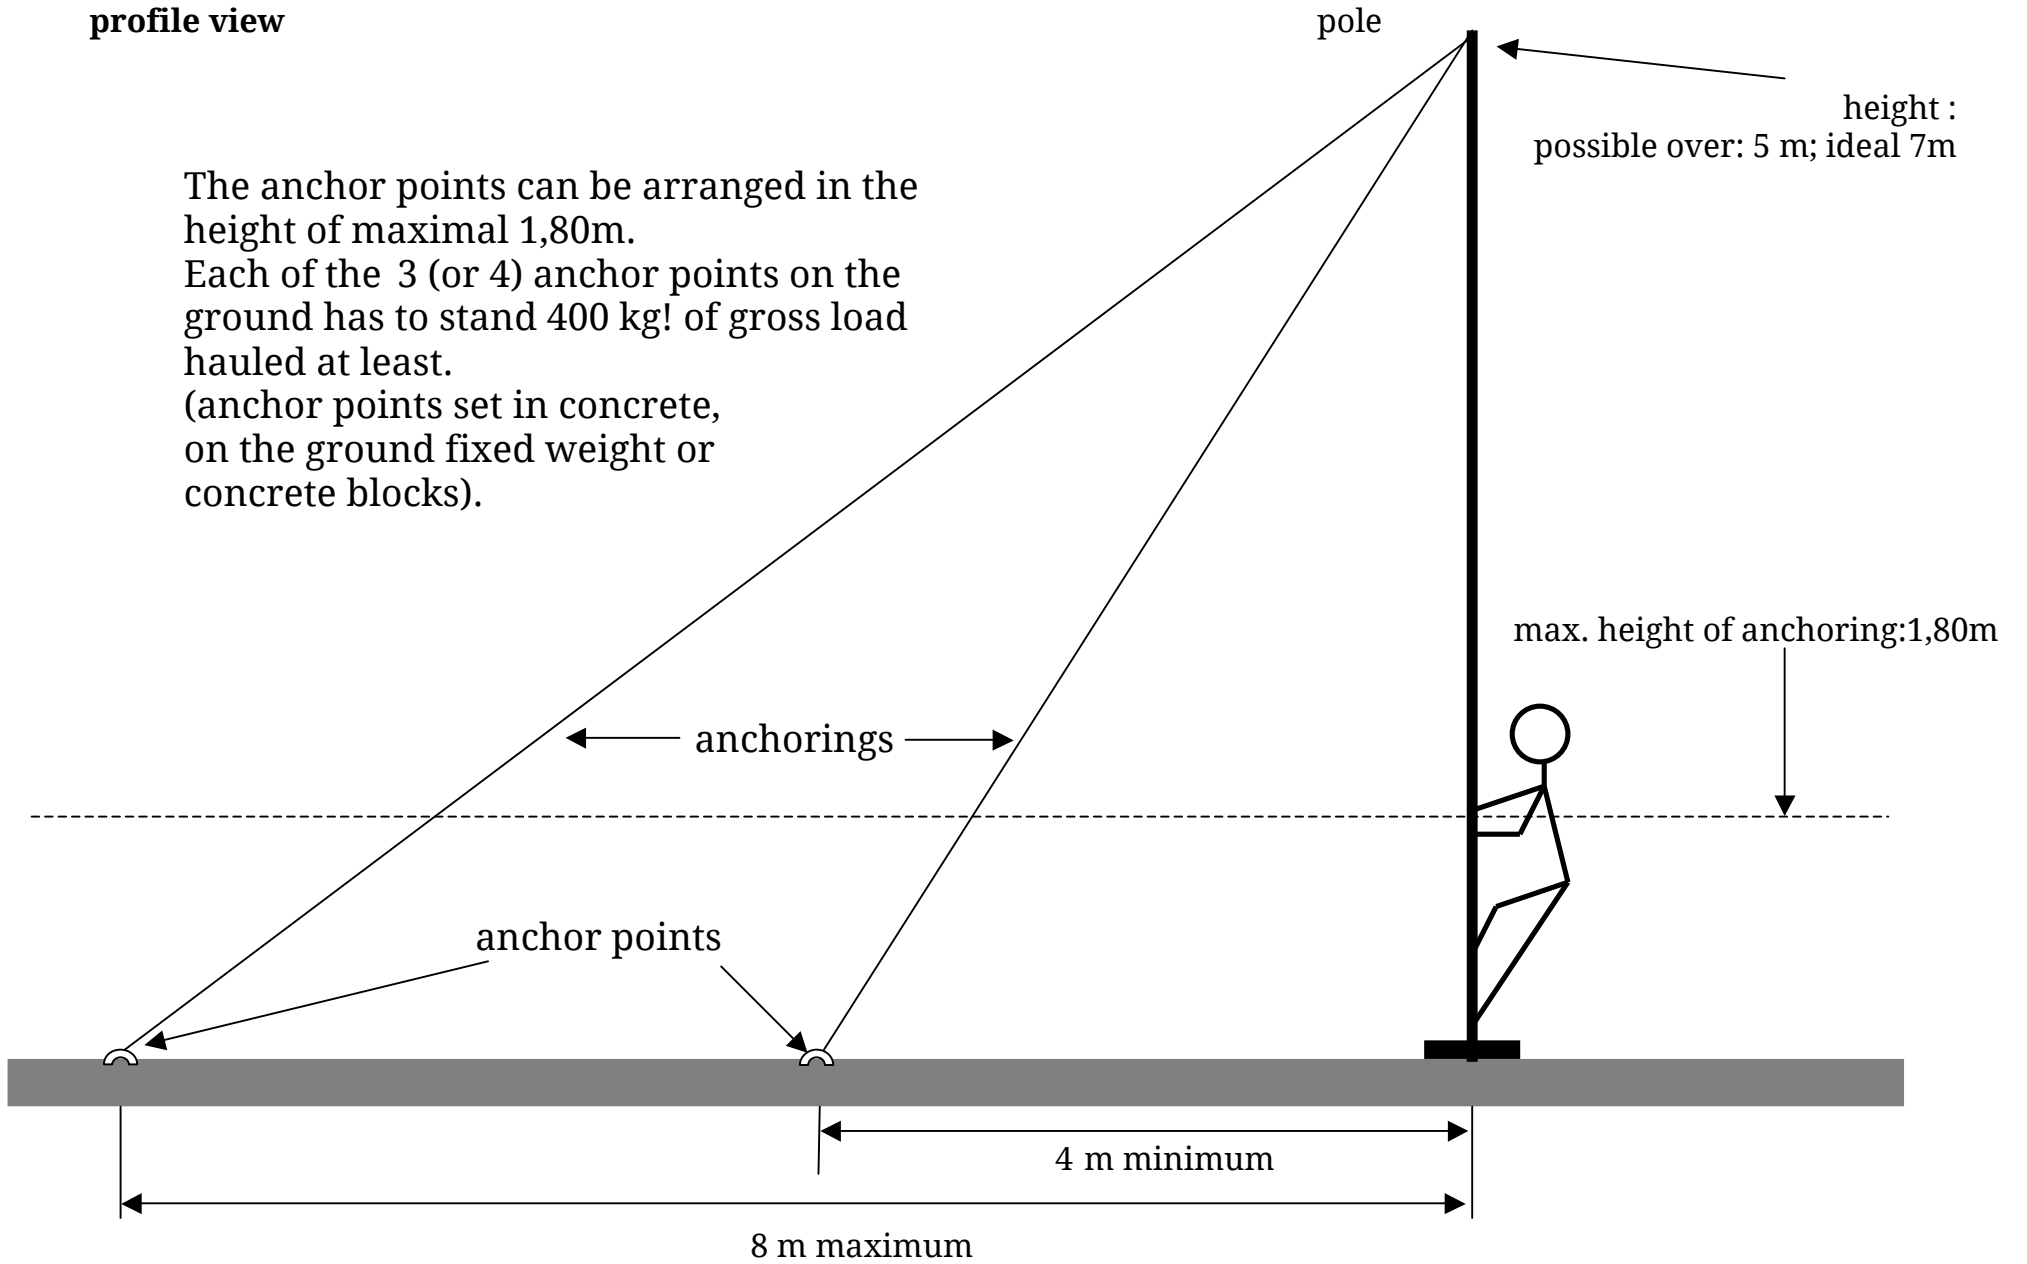


view from above
angles of the anchor points

public

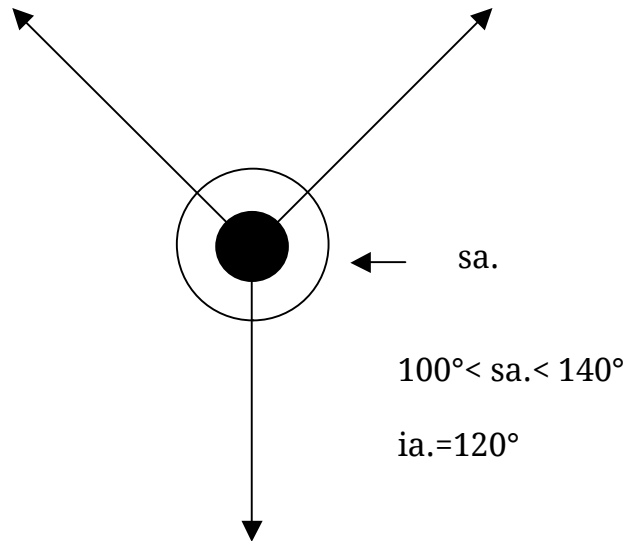

configuration with 3 anchor points

public

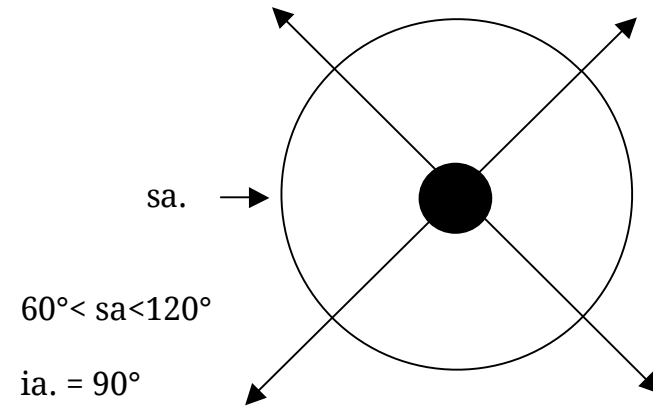

configuration with 4 anchor points

- = anchoring
- = Chinese pole
- ia. = ideal angle
- sa. = safety angle